

We convert your waste heat into electric power

Converting waste heat into electric power

The Againity ORC System extracts energy from your waste heat and converts it to electricity. With our solution you can save fuel or gain more power from your system.

The ORC technology

Againity's turbine system is based on the long-known ORC technology (Organic Rankine Cycle), which is illustrated in the image below. The technology includes a steam turbine set in motion by the pressure from hot steam. The rotating turbine then drives a generator that produces electricity. In good conditions the electrical efficiency is 20%.

Heating and cooling source

To heat up the steam some kind of heat source is needed. Any heat with a temperature from 90°C can be utilized in the system. After the turbine, the steam is


cooled down by a cooling system connected to either the outdoor air, a river nearby, or hot tap water for residential buildings, hotels, hospitals or industries.


Quality first

Thanks to the unique design of our patentpending turbine and the low number of moving parts in the system, a high-quality product can be offered. This minimizes the need for service and maintenance and significantly shortens the payback time.

Adding the Againity ORC System to your existing system increases the effectiveness of your plant – at a low investment cost.



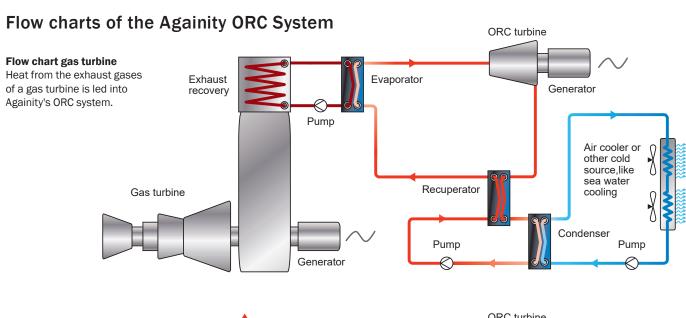

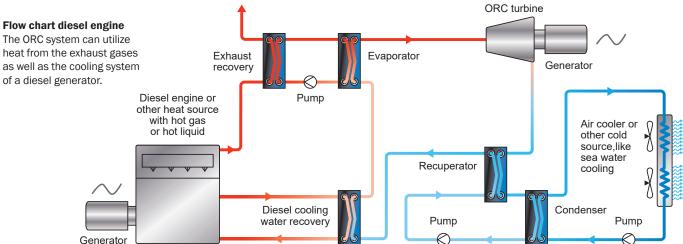

Versatile application possibilities


The Againity ORC System can be installed in numerous applications, enabling you to gain more power from your existing system while saving energy and the environment.

Manufacturing

In manufacturing industries using diesel generators, gas turbines or heating processes

there is heat generated in the exhaust gases as well as in cooling systems. These heat sources can easily be connected to Againity's system transforming the heat into electric power.

Boilers and heating plants



heat from the ORC system can be utilized for local heat demands or cooled with air convector fans.

Mining



The mining industry often needs reliable sources of electricity for a safe and efficient production.

By adding the Againity ORC System, energy cost savings without decreased reliability can be realized.



Installed capacity 100 kWe


Real estate & hotels



With the Againity ORC System you can use your sun panels not only for hot water generation but also to produce electricity.

By storing the hot water in isolated water tanks you can store the energy until you need it - without expensive batteries.

Power production plants



Also solar and geothermal energy can easily be turned into electric power with the Againity ORC System. By storing the hot water in well insulated water tanks the electricity production can continue day and night.

Benefits

A versatile system

The Againity ORC System consists of a stand-alone modular system specifically designed for easy installation at a wide range of industrial facilities.

Cost effective design

The innovative high efficiency turbine is designed for long service intervals reducing maintenance costs.

Simple commissioning

All our systems are factory built and tested, enabling a quick and easy installation on-site - almost like plug and play. On-site installation requires simply connecting the Againity system to the heat source and then plugging in to the electricity network.

Fully automated

The Againity ORC System is fully automated and designed for versatile use under a wide range of operating conditions. The system is equipped with a TCP/IP connection for remote monitoring and control - thus no personnel are required

The range

Againity ORC modules starts at 50 kWe and are available up to 2 500 kWe. The modules are easily combined and the maximal power output of a plant hence unlimited. The systems are fabricated and delivered at a high grade of preassembly units for short installation and commissioning time at site.







Againity offers ORC systems from 50 to 2500 kWe. Installed capacity is designed specifically for each customer case and the models in the table below show examples of different power outputs and corresponding dimensions.

Installed capacity	50 kWe	100 kWe	200 kWe	500 kWe	1000 kWe	2500 kWe
Size ¹ (LxWxH)	4.1 x 1.7 x 2.5 m	4.1 x 1.7 x 2.5 m	5.5 x 2.2 x 2.5 m	6.0 x 2.2 x 2.5 m	12.2 x 2.5 x 2.9 m Size of 40 ft container	22.0 x 2.5 x 2.9 m Size of 40 + 20 ft containers
Frequence	50-60 Hz	50-60 Hz				
Weight	4.0 ton	5.0 ton	9.0 ton	12.0 ton	_	_
Voltage ²	380-415 V	380-415 V	380-415 V	380–415 V	3000-6000 V	3000-6000 V

 $^{^{1)}}$ The measurements are approximate and tailored according to technical conditions of each built ORC system.

²⁾ Other voltages on request.

Copyright © Againity

Againity AB

Ingelstagatan 1 SE-602 41 Norrköping, Sweden Phone: +46 (0)70 529 32 23 e-mail: info@againity.com

www.againity.com





